


CHARGE GENERATOR Easy Charge-30



The **EASY CHARGE-30** charging generator creates an adjustable high voltage between 0 to 30 kV and an also adjustable current between 0 and 1,0 mA. Its controls are very intuitive and thus easy to be used by the operator also thanks to the oled display, where you can read both voltage, instantaneous current and working mode; moreover, it can be remotely controlled by means of the remote control analogical function. It can have positive or negative charge on request and up to 2 exits.

EASY CHARGE-30	
Frame material	ABS
Weight	1,3 kg
Connections	2
Display	Oled
Working temperature	0 - 60 °C
Primary voltage	24V DC -1,5 A max.
Energy consumption	30 Watt max.
Secondary output	0 - 30 kV DC
Secondary current	Max.1 mA up to 20 Kv; max. 0.6mA at 30 Kv
Polarity	Positive or negative
Features	Voltage and current control, overload indicator, Remotely controlled analogical function, controls keyboard

ANTISTATIC CONTROL SYSTEMS

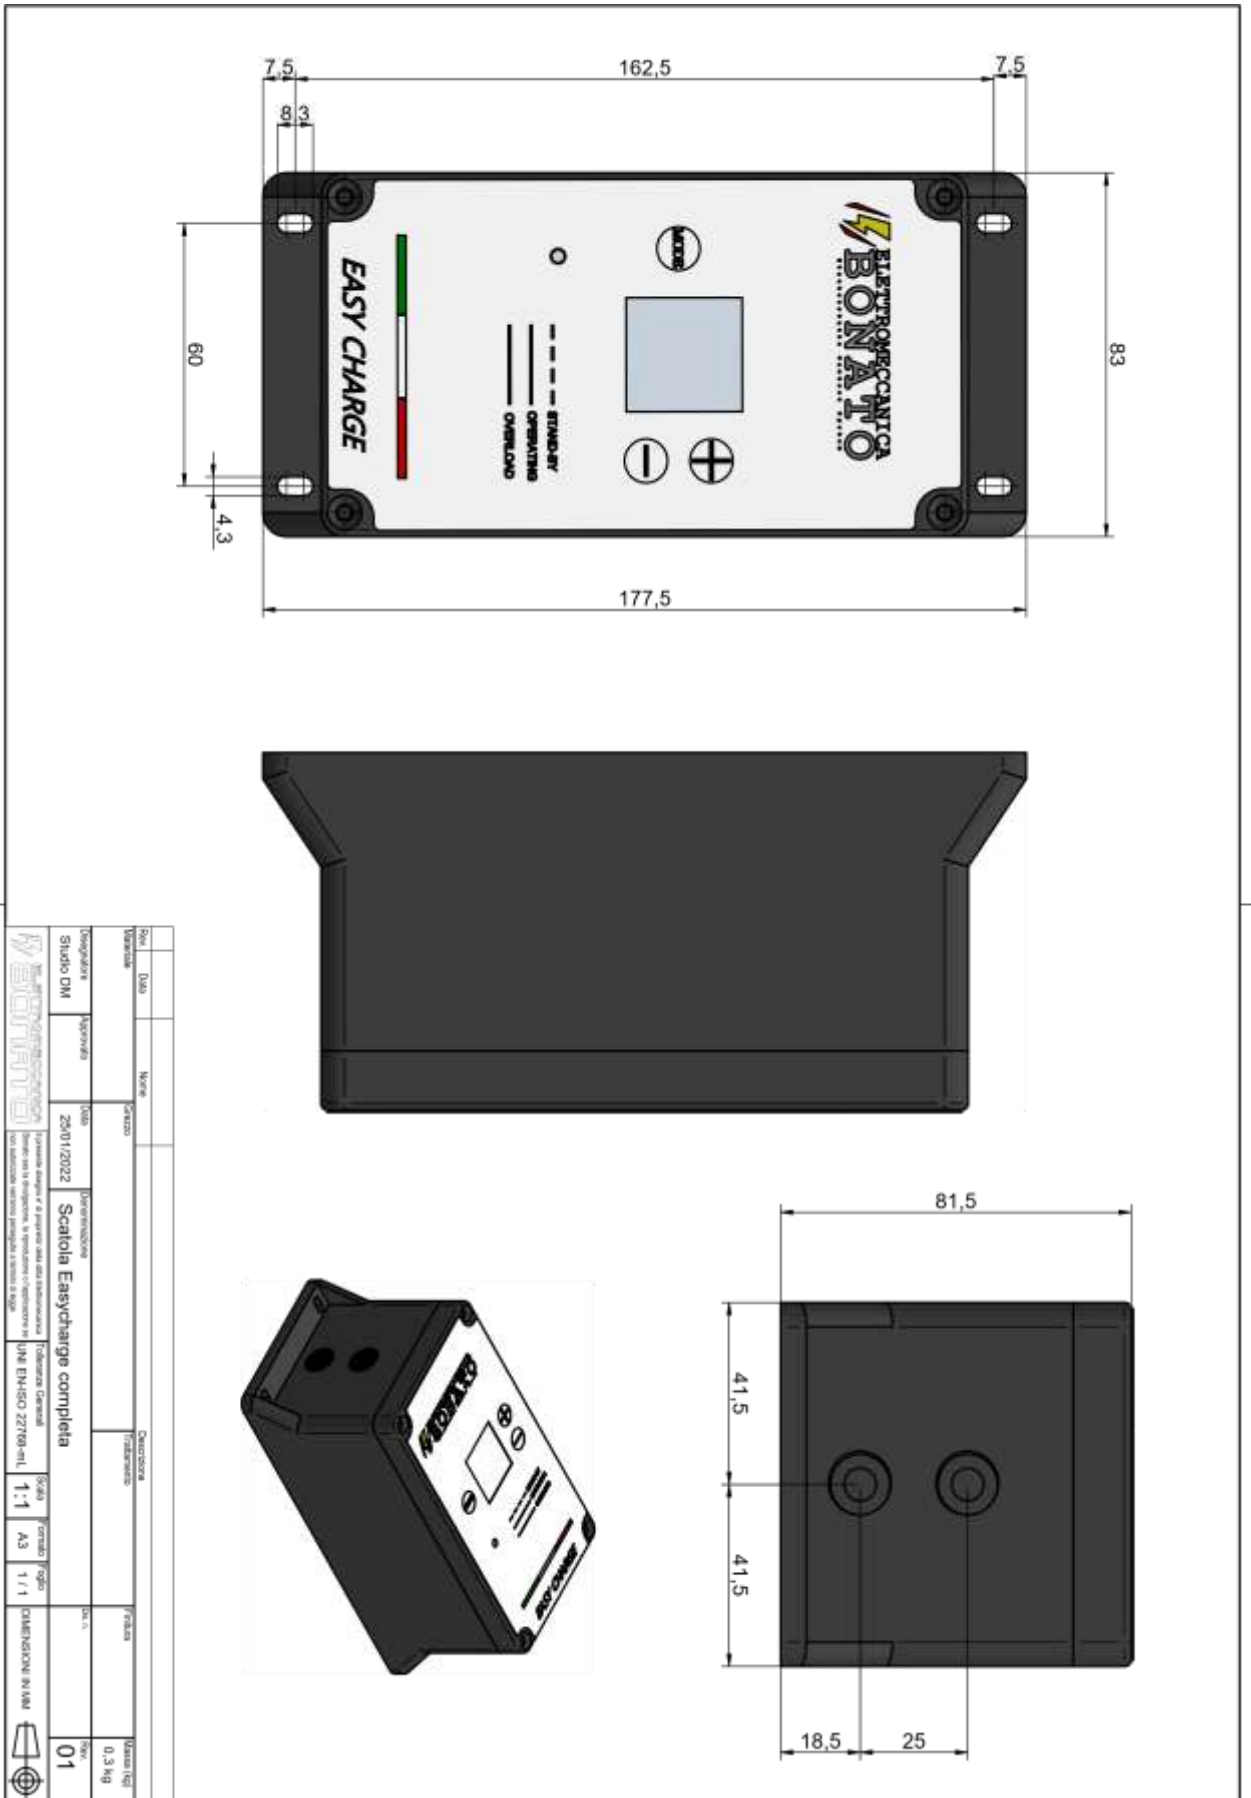

ELETTROMECCANICA BONATO

36010 Carré (Vicenza) ITALY - Via Rostoncello, 25/b T 0445 368178 - F 0445 364371
www.elettromeccanicabonato.it - info@elettromeccanicabonato.it