

APS2 POWER SUPPLY





The **APS2** generates high voltage, which is necessary for the ionizers functioning.

The **APS2** power supply can power up to 2 antistatic devices, has external jack connections, is mounted in a painted metal box, with ON / OFF control switch, stand-by, service and faults indicator LEDs, electronic protection in case overload or short circuit, remote ON / OFF command and remote alarm signal.

APS2	
Weight	4,1 Kg
Room temperature	0-60°C
Primary voltage	230 V, 50/60 Hz
Secondary voltage	7000 V
Consumption	40 W
Short-circuit current	3 mA

ELETTROMECCANICA BONATO

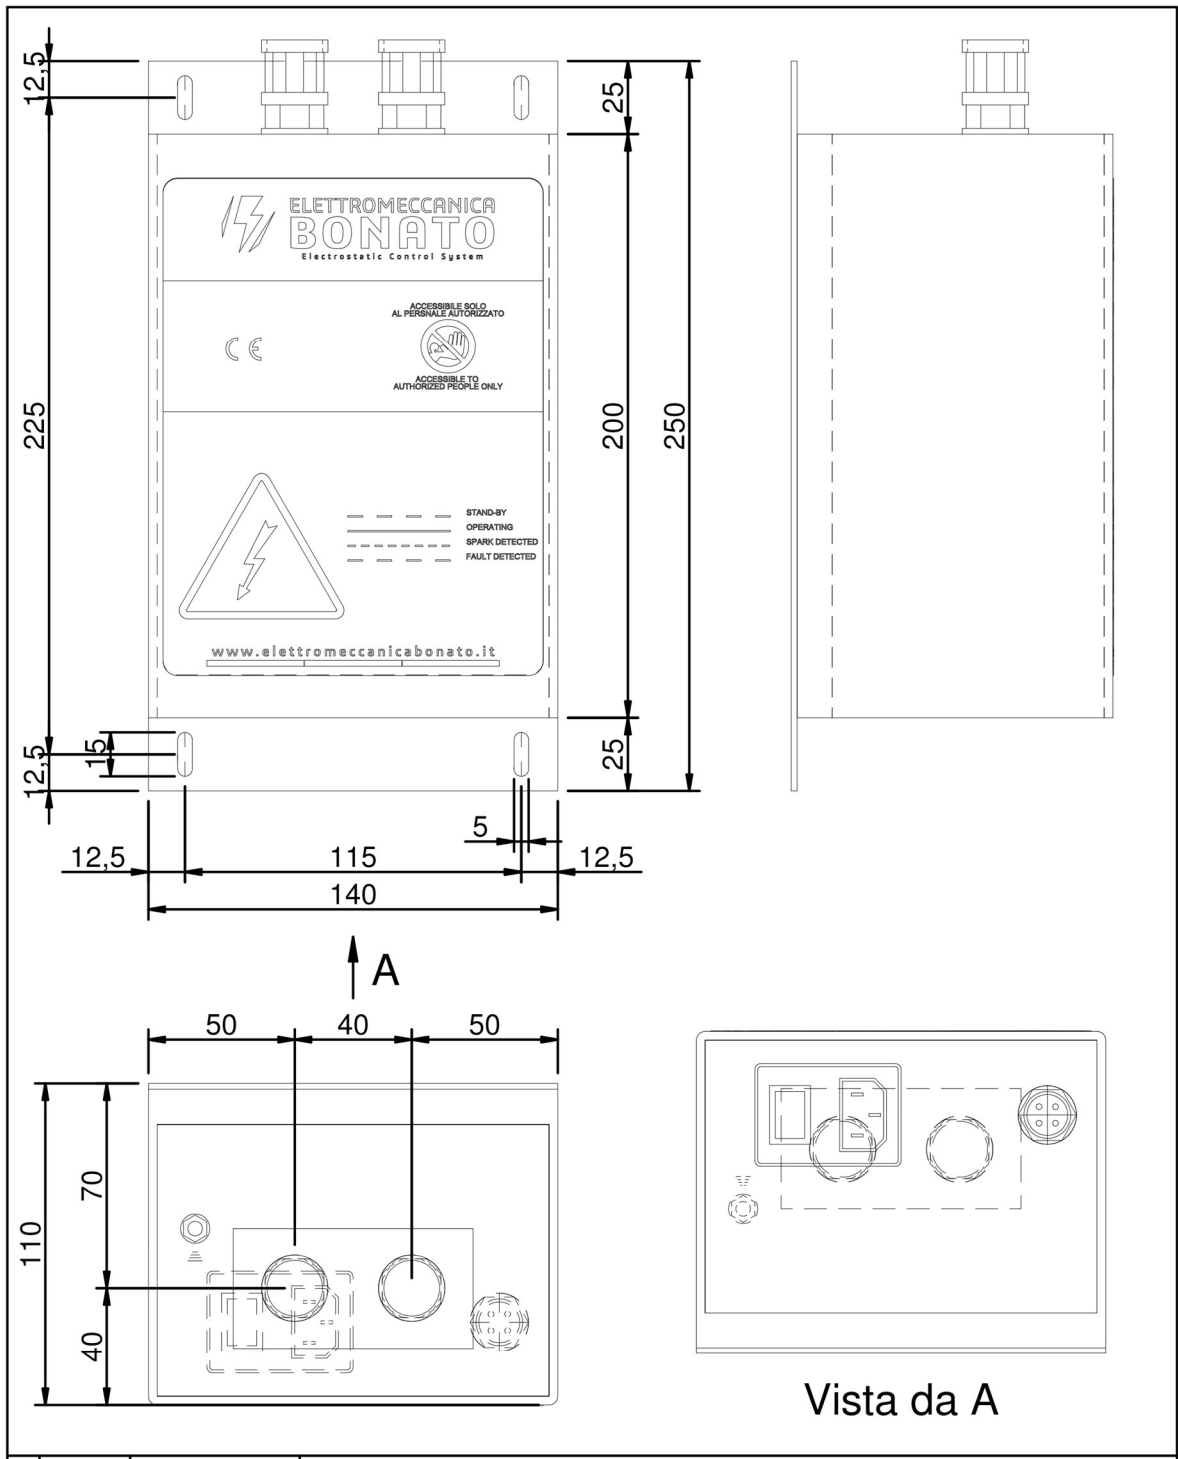

Rev.	Data	Nome	Descrizione			
Materiale	Grezzo		Trattamento		Finitura	Massa (kg) 0,000 kg
Disegnatore Studio DM	Approvato	Data 09/10/2020	Denominazione Antistatic Power Supply APS2		Dis. n. APS2	Rev. 00
			Tolleranze Generali UNI EN-ISO 22768-mL		Scala 2:1	Formato Foglio A4 1 / 1
Elettromeccanica Bonato s.p.a. la divulgazione, la riproduzione o l'applicazione non autorizzate verranno perseguite a termini di legge			DIMENSIONI IN MM		