

IONIZING POINTS IP-01




Ionizing nozzles are employed where installation conditions are critical, especially in confined spaces. These nozzles has a pvc core, where all its electronic components are impregnated in epoxy resin so as to ensure safety and durability.

Our ionizing nozzles can have multiple configurations and can be connected in series even in circular shape according to customer's needs.

Like other active anti-static equipment, also ionizing nozzles must be connected to an anti-static power supply by means of a high-tension cable

IP-01	
Working distance	Up to 150 mm
Working tension	6,5 KV
Power supply	PS1WR, AF2-4WR
Emitters	Stainless steel
Ambient temperature	0° C - 70° C

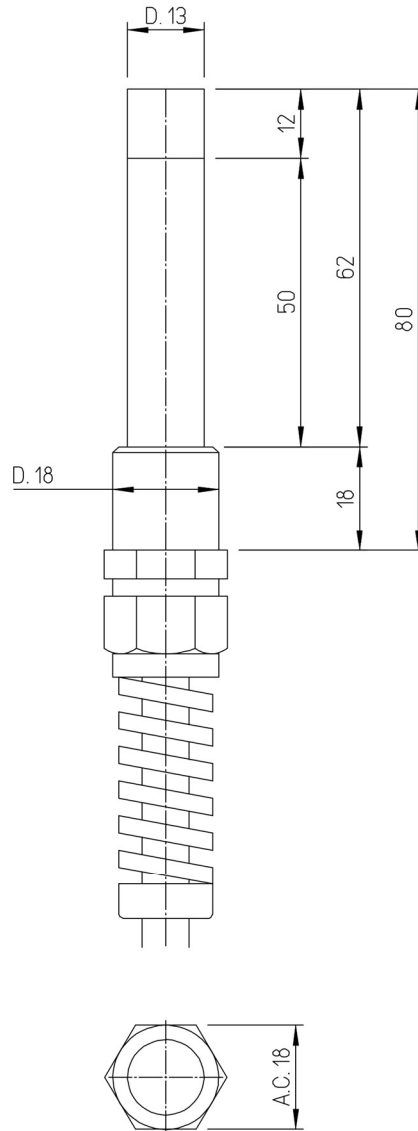

1	1	-	-	-					
POS.	QUANTITA'	CODICE	DESCRIZIONE PARTICOLARE	DIMENSIONI / NOTE					
REV.N.	DESCRIZIONE MODIFICA DI REVISIONE			DATA					
				FIRMA					
Scostamenti in mm. per dimensioni senza indicazioni di tolleranza secondo UNI 5307. GRADO DI PRECISIONE MEDIO		0 - 6	> 6 - 30	> 30 - 120	> 120 - 315	> 315 - 1000	> 1000 - 2000	DISEGNATO	VERIFICATO
		± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	DATA	SOSTITUISCE IL
DENOMINAZIONE								02/12/2021	
IP-01								SCALA	SOSTITUITO DAL
								1 : 1	
ELETTROMECCANICA BONATO							DISEGNO N	INDICE	
							206A	0	