


ABSL-RC ANTISTATIC BARS

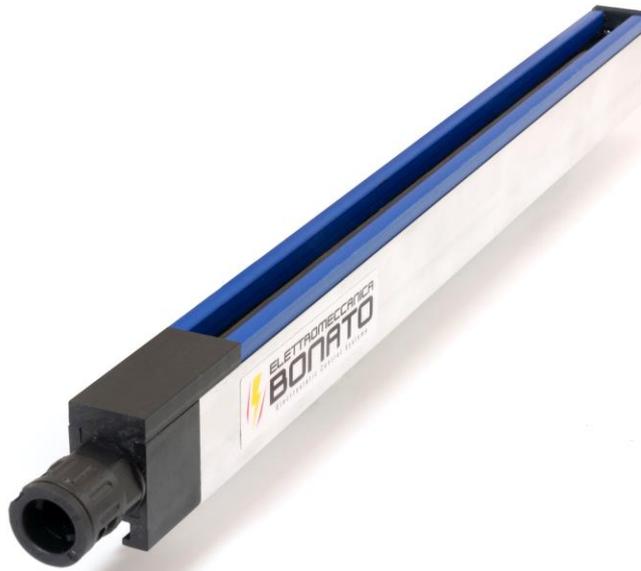

The antistatic bars **ABSL-RC** (shockless) we produce can be used in many sectors, such as textile manufacturing, paper, plastics, printing, in converting, packaging etc.

The antistatic bar **ABSL-RC** is designed to be installed in machines working at high speed, it is very effective in the removal of electrostatic charges.


This antistatic bar has a PVC core, where all its electronic components are impregnated in epoxy resin so as to ensure safety and durability. It is coated with aluminium, with stainless steel emitters.

The emitters are connected resistively to high voltage, so there are no risks for the operator in the event of accidental contact and this allows having a higher productivity of the bar.

Our antistatic bars are custom made according to customers' requirements.

This antistatic bar has a slit where to place the M6 screws for fastening, so it is possible to place them anywhere for the entire length of the bar.

ABSL-RC	
Working distance	20 - 200 mm
Operating voltage	7000 VAC
Power supply	AF2WR - AF4WR - APS2 - APS4
Weight	1.1 kg / m
Machine maximum speed	500 m / min
Ambient temperature	0° C - 70° C
Lengths	from 100 mm to 6000 mm

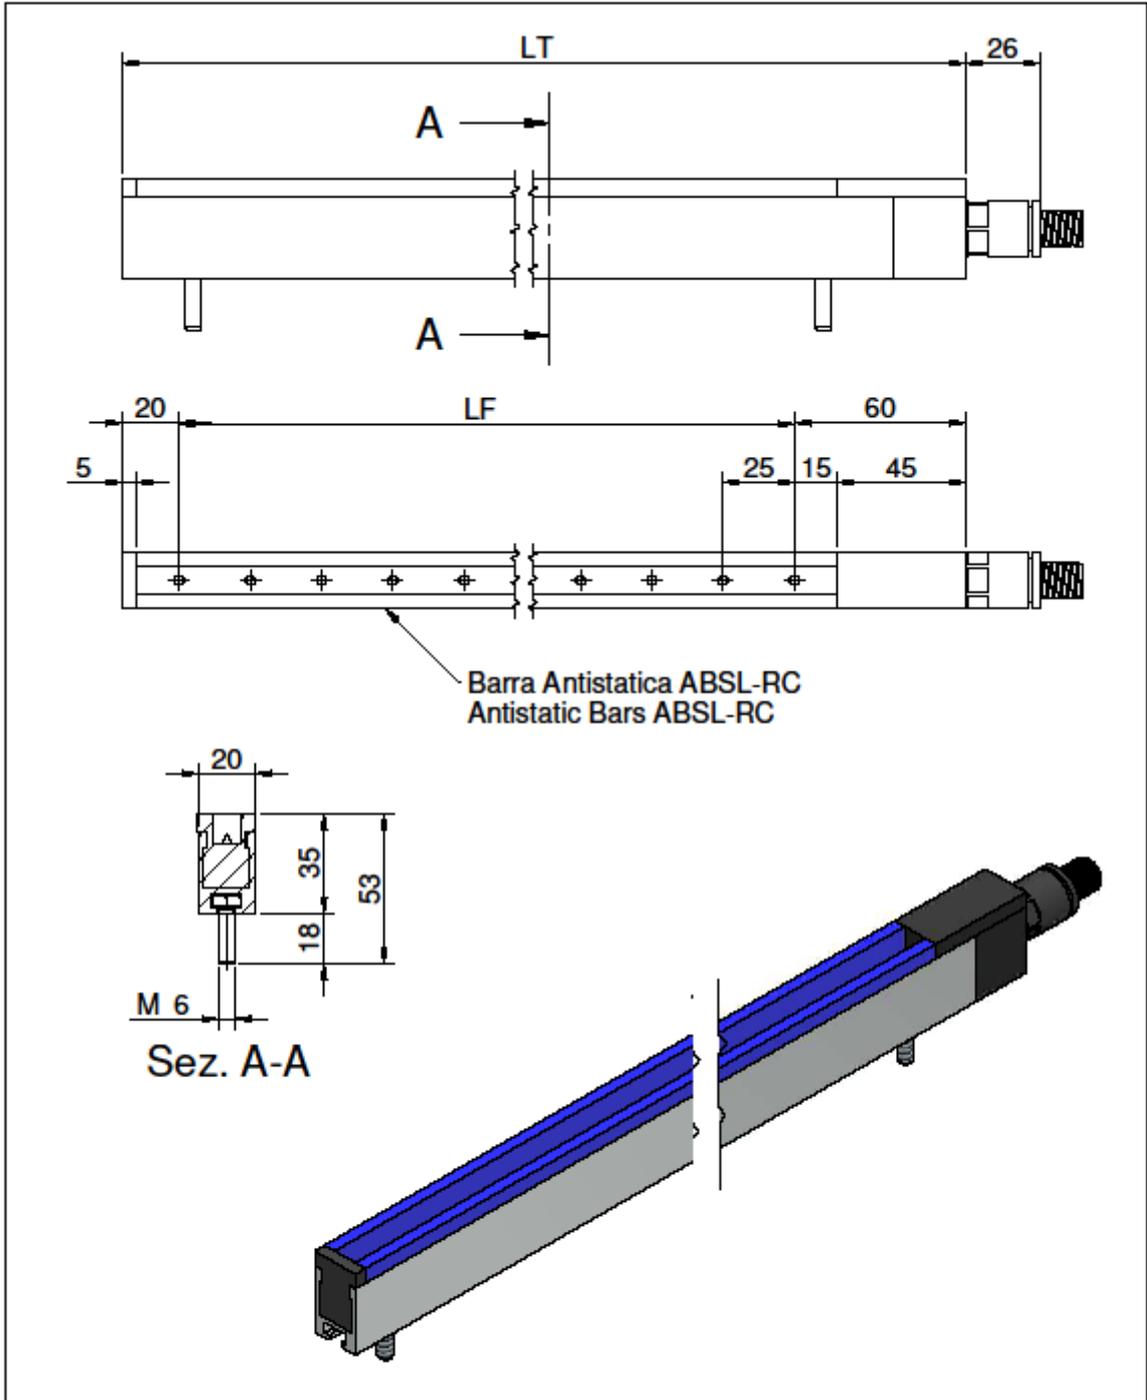

Rev.	Data	Nome	Descrizione		
Materiali		Grasso	Treatmento	Finitura	Massa (kg) 0,0 kg
Disegnato Studio DM	Approvato	Data 04/03/2020	Denominazione Barra Antistatica ABSL-RC		Dic. n. ABSL-RC Rev. 00
<small>Il presente disegno e' di proprieta' della ditta Elettromeccanica Bonato e la sua divulgazione, la riproduzione o l'applicazione non autorizzate e' vietata perseguita a termini di legge.</small>			Tolleranze Generali UNI EN-ISO 22768-mL	Scala 1:2	Formato A4 Foglio 1 / 1
DIMENSIONI IN MM					