

ANTISTATIC BRUSH AB




Our antistatic brush **AB** in carbon fibres are able to remove the electrostatic charges present on the surfaces of the materials processed.

The brush bristles are soft and thin, so that the brush touches the material with the static charge without damaging it.

The antistatic brushes do not have to touch the material to discharge it, but if the static charge is not high, they can be installed at a distance of 2-5 mm. Moreover, they do not need any power supply unit, but only grounding and are easy to install.

Our antistatic brushes can be made in different lengths according to the customer requirements.

AB	
Electrical resistance	1,7X10 ⁻³ Ohm cm
Ground wire	4-6 mm ² yellow green
Working temperature	0-150°C
Bristle diameter	4X10 ⁻³ mm
Max length	4000 mm
Weight	540 gr/LM

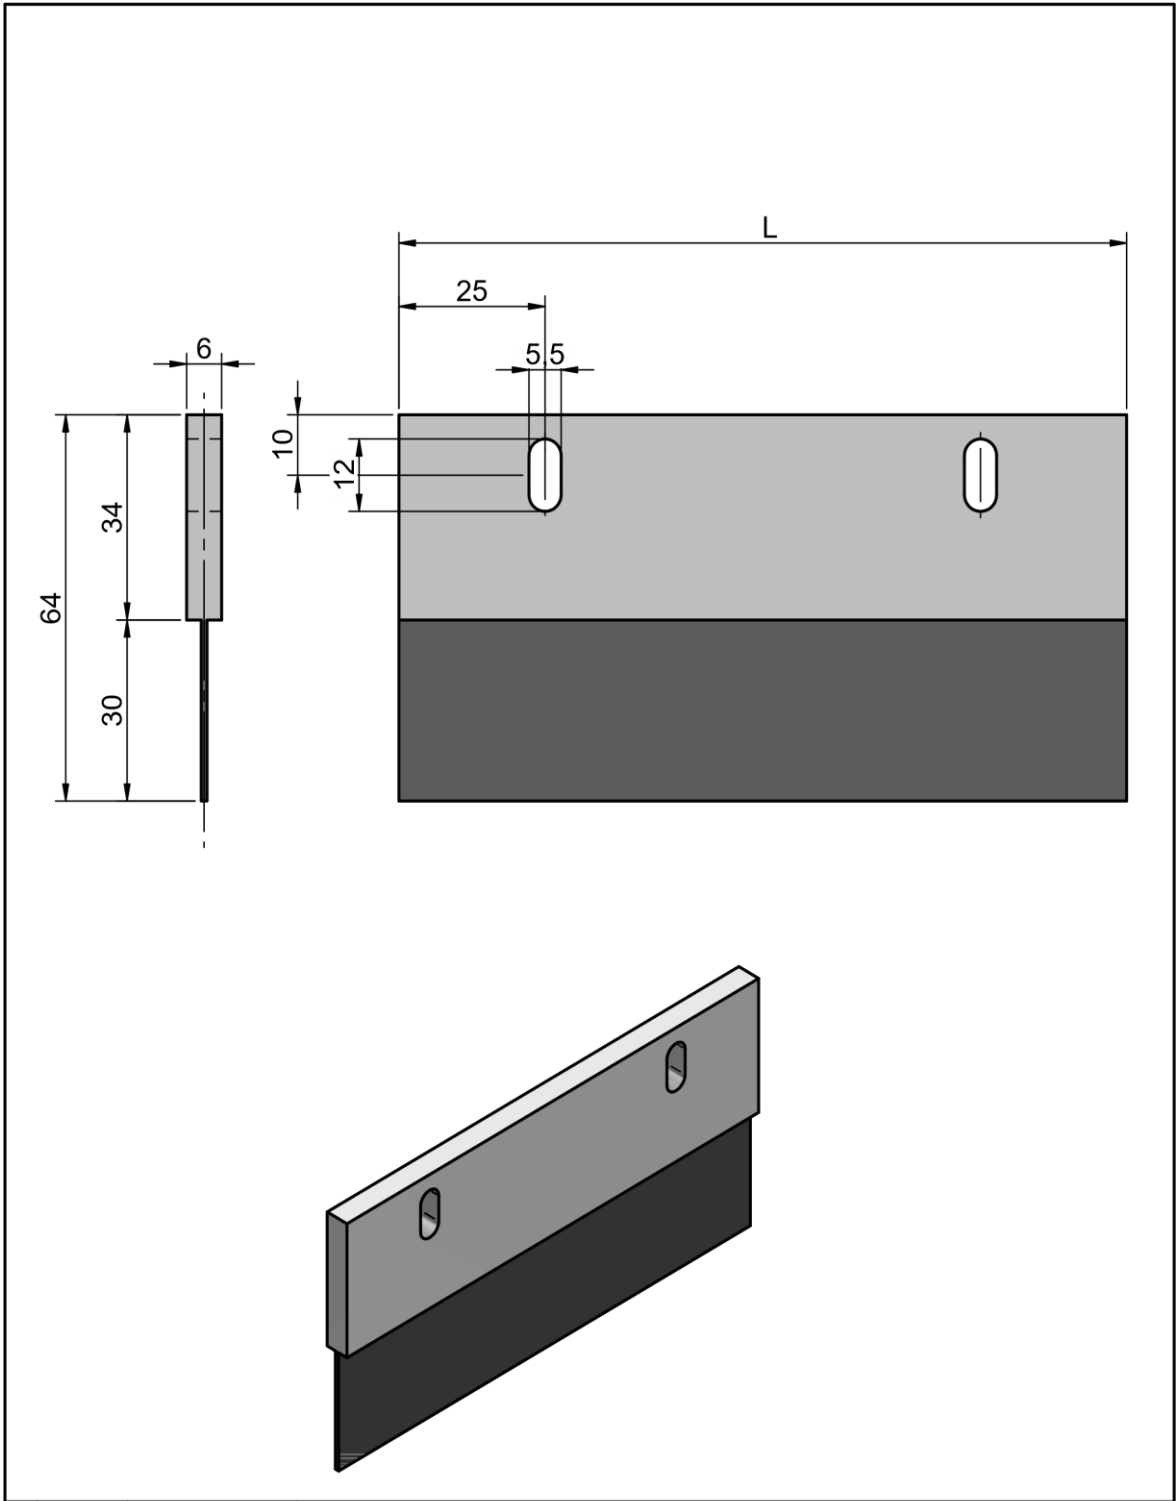

Rev.	Data	Nome		Descrizione			
Materiale		Grezzo		Trattamento		Finitura	Massa (kg)
Composito							0,0 kg
Disegnatore	Approvato	Data	Denominazione		Dis. n.	Rev.	
Studio DM		22/04/2022	AB-ANTISTATIC BRUSH			01	
		<small>Il presente disegno e' di proprieta' della ditta Elettromeccanica Bonato sas la divulgazione, la riproduzione o l'applicazione se non autorizzate verranno perseguite a termini di legge</small>		Tolleranze Generali	Scala	Formato	Foglio
				UNI EN-ISO 22768-mL	1:1	A4	1 / 1
						DIMENSIONI IN MM	