



CHARGE GENERATOR Easy Charge-30

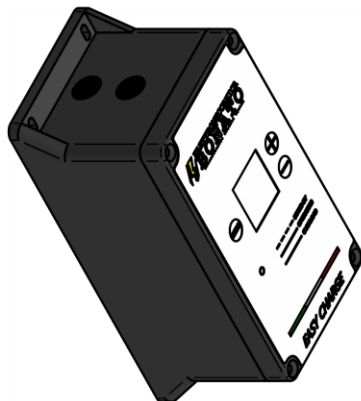

The **EASY CHARGE-30** charging generator creates an adjustable high voltage between 0 to 30 kV and an also adjustable current between 0 and 1,0 mA. Its controls are very intuitive and thus easy to be used by the operator also thanks to the oled display, where you can read both voltage, instantaneous current and working mode; moreover, it can be remotely controlled by means of the remote control analogical function. It can have positive or negative charge on request and up to 2 exits.

EASY CHARGE-30	
Frame material	ABS
Weight	1,3 kg
Connections	2
Display	Oled
Working temperature	0 - 60 °C
Primary voltage	24V DC -1,5 A max.
Energy consumption	30 Watt max.
Secondary output	0 - 30 kV DC
Secondary current	Max.1 mA up to 20 Kv; max. 0.6mA at 30 Kv
Polarity	Positive or negative
Features	Voltage and current control, overload indicator, Remotely controlled analogical function, controls keyboard

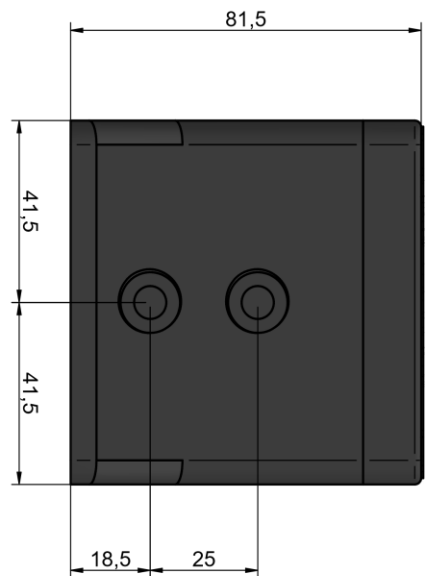

Rev.	Data	Nome		Descrizione		Finitura		Massa (kg)
Materiali		G6320		Trattamento		0,3 kg		
Disegnatore	Approvato	Data		Parametri		Dici. n.		
Studio DM		29/01/2022		Scatola Easychange completa		Dici. n.		01
Il presente disegno è di proprietà della ditta Euroinformato e Bentato sarà in obbligo, in produzione o riproduzione, di non alterare, senza permesso, il disegno e la firma.								
Tolleranze Generali		Scala		Formato		Foglio		
UNI EN ISO 22768-nli		1:1		A3		1 / 1		
DIMENSIONI IN MM								